

Dynalife® HT

Dynalife HT is a high-quality, multipurpose, extreme-pressure (EP) lithium complex grease developed for the lubrication of automotive and industrial equipment operating under heavy loads and at moderate to high temperatures. It is recommended for use in a variety of automotive, agricultural, mining and industrial applications. It is NLGI GC-LB certified for use as a multipurpose automotive wheel bearing and chassis lubricant.

Dynalife HT is manufactured with high-quality, heavy paraffinic base oils thickened with lithium complex soap. It is fortified with extreme-pressure and antiwear additives, a tackifier, and rust and oxidation inhibitors to provide excellent wear protection, excellent thermal stability at high temperatures, and excellent resistance to corrosion and water washout. The combination of tackifier and heavy base oil provides a high level of adhesion to metal parts for improved retention and reduced leakage at high temperatures, and enhanced resistance to water washout.

Dynalife HT forms an effective seal to help minimize bearing contamination. It is dyed red for ease of identification.

Applications

- Heavily loaded plain and rolling-element bearings in agricultural, construction, mining and industrial equipment
- Wheel bearings of passenger cars, trucks, high-performance vehicles, sport utility vehicles and motorcycles equipped with disc brakes
- Ball joints, universal joints, other chassis parts and water pumps on passenger cars, trucks and other mobile equipment
- Grease guns in auto repair shops
- Conveyor bearings

Features/Benefits

- Excellent high-temperature performance
- Excellent wear protection
- High load-carrying capacity
- Protects against rust and corrosion
- Excellent resistance to water washout
- Good low-temperature pumpability
- NLGI GC-LB certified

**Multipurpose,
Heavy Base Oil,
Extreme-Pressure
Lithium Complex
Grease; NLGI GC-LB
Certified**


Contact Information

**U.S. Customer
Service:
1-800-822-6457**

**Technical Hot Line:
1-877-445-9198**

**International
Customer Service:
+1-832-486-3363**

**E-mail address:
lubricants@
conocophillips.com**

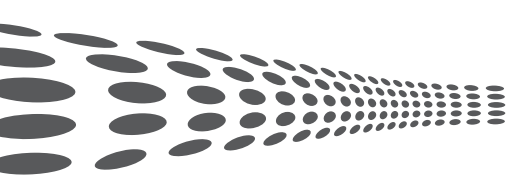

Dynalife® HT
Typical Properties

NLGI Grade	1	2
Thickener	Lithium Complex	Lithium Complex
Color	Red	Red
Dropping Point, °C (°F)	260 (500)	288 (550)
Density, lbs/gal	7.44	7.44
Penetration, Worked (60 strokes), ASTM D217	310-340	265-295
Texture	Smooth/Tacky	Smooth/Tacky
Four-Ball EP, ASTM D2596, Weld Load, kgf	315	315
Four-Ball Wear, ASTM D2266, Scar Diameter, mm	0.45	0.45
Oxidation Stability, ASTM D942, 100 hrs, Pressure Drop, psi (kPa)	2 (15)	2 (15)
Rust Prevention, ASTM D1743	Pass	Pass
Timken OK Load, ASTM D2509, lb	70	80
Water Washout Resistance, ASTM D1264, Weight Loss @ 175°F, %	7.50	2.75
Base Oil Properties:		
Viscosity,		
cSt @ 40°C	625	625
cSt @ 100°C	40.0	40.0
SUS @ 100°F	3,350	3,350
SUS @ 210°F	195	195
Viscosity Index	104	104
Usable Temperature Range,		
°C	-18 to 204	-12 to 204
°F	0 to 400	10 to 400

Health and Safety Information

For recommendations on safe handling and use of this product, please refer to the Material Safety Data Sheet via <http://w3.conocophillips.com/NetMSDS>.

Typical properties are average values only and do not constitute a specification. Minor variations that do not affect product performance are to be expected during normal manufacture, and at different blending locations. Product formulations are subject to change without notification.

Copyright © 2010 ConocoPhillips Company. The ConocoPhillips logo, Conoco, the Conoco logo, Phillips 66, the Phillips 66 logo, 76 and the 76 logo are trademarks of ConocoPhillips Company in the U.S.A. and other countries.